PHILIPS Lighting



MASTER PL-C 4 Pin

MASTER PL-C 18W/827/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Correlated Color Temperature (Nom)	2700 K
Cap-Base	G24Q-2 [G24q-2]	Luminous Efficacy (rated) (Nom)	67 lm/W
Life to 50% Failures Preheat (Nom)	13000 h	Color Rendering Index (Nom)	82
LSF Preheat 2000 h Rated	99 %	LLMF 2000 h Rated	92 %
LSF Preheat 4000 h Rated	98 %	LLMF 4000 h Rated	87 %
LSF Preheat 6000 h Rated	97 %	LLMF 6000 h Rated	83 %
LSF Preheat 8000 h Rated	90 %	LLMF 8000 h Rated	81 %
Light technical		Operating and electrical	
Color Code	827 [CCT of 2700K]	Power (Nom)	16.5 W
Luminous Flux (Nom)	1200 lm	Lamp Current (Nom)	0.230 A
Luminous Flux (Rated) (Nom)	1200 lm		
Color Designation	Incandescent White		

MASTER PL-C 4 Pin

Temperature			
Design Temperature (Nom)	28 °C		
Controls and dimming			
Dimmable	Yes		
Mechanical and housing			
Cap-Base Information	4 Pins		
Approval and application			
Mercury (Hg) Content (Nom)	1.4 mg		
Energy Consumption kWh/1000 h	20 kWh		


Product data			
Full product code	871150062327000		
Order product name	MASTER PL-C 18W/827/4P 1CT/5X10BOX		
EAN/UPC - Product	8711500623270		
Order code	927907282701		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	50		
Material Nr. (12NC)	927907282701		
Net Weight (Piece)	55.300 g		
ILCOS Code	FSQ-18/27/1B-E-G24q=2		

Dimensional drawing




MASTER PL-C 18W/827/4P 1CT/5X10BOX

Photometric data

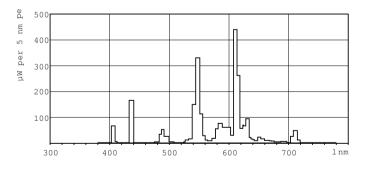


LDPB_PLC4P_827-Spectral power distribution B/W

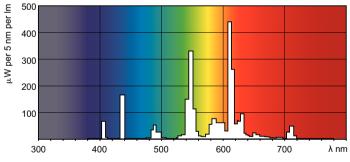



MASTER PL-C 4 Pin

Lifetime

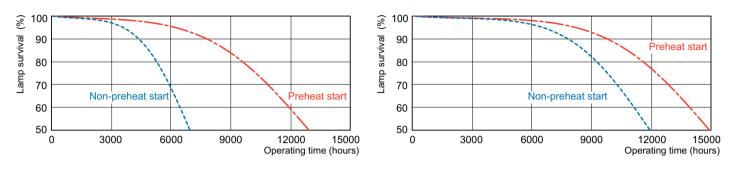



☐ 100 IN			
% 100			
	1		

LDLE_PLC4P_0002-Life expectancy diagram

LDLM_PLC4P_0001-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2022, August 8 - data subject to change