



Colourful and Connected LED Printer

Flawless printing with flexible connectivity

HL-L3240CDW



PRINT



5GHz
WIRELESS

www.brother.eu

Colour Wireless LED Printer

The colourful and connected HL-L3240CDW is expertly engineered to quietly deliver high-quality documents without compromising on speed.

The high capacity paper input and output trays help to keep your office running smoothly.

HL-L3240CDW



Key features:

- Print up to 26 pages per minute
- 2-Sided print, up to 10 sides per minute
- 1 Line LCD control panel
- Gigabit ethernet, 5GHz WiFi and USB
- 256MB Internal memory
- 250 Sheet paper input tray¹¹
- Comes with 1,000 black, 1,000 colour page yield toners, 2,300 black, 3,000 colour maximum yield available⁸

Quiet without compromise

Print quietly without having to compromise on speed or quality. The HL-L3240CDW prints full colour pages quickly and flawlessly whilst still being quieter than your average office conversation, making this device perfect for desktop working.

Save time

High quality LED print technology ensures that your output is flawless and professional every time. The expertly designed HL-L3240CDW has a high capacity paper input and output tray allowing you to print for longer.

Effortless

Make your day easier and your printing effortless, with simple set up and gigabit ethernet, 5GHz WiFi or USB connection. This efficient HL-L3240CDW is a breeze to operate using the easy to navigate control panel.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The HL-L3240CDW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere

With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.

Download the app on your mobile device to get started.



decopro

The automated toner subscription for your printer


Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.



TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: brother.co.uk/decopro

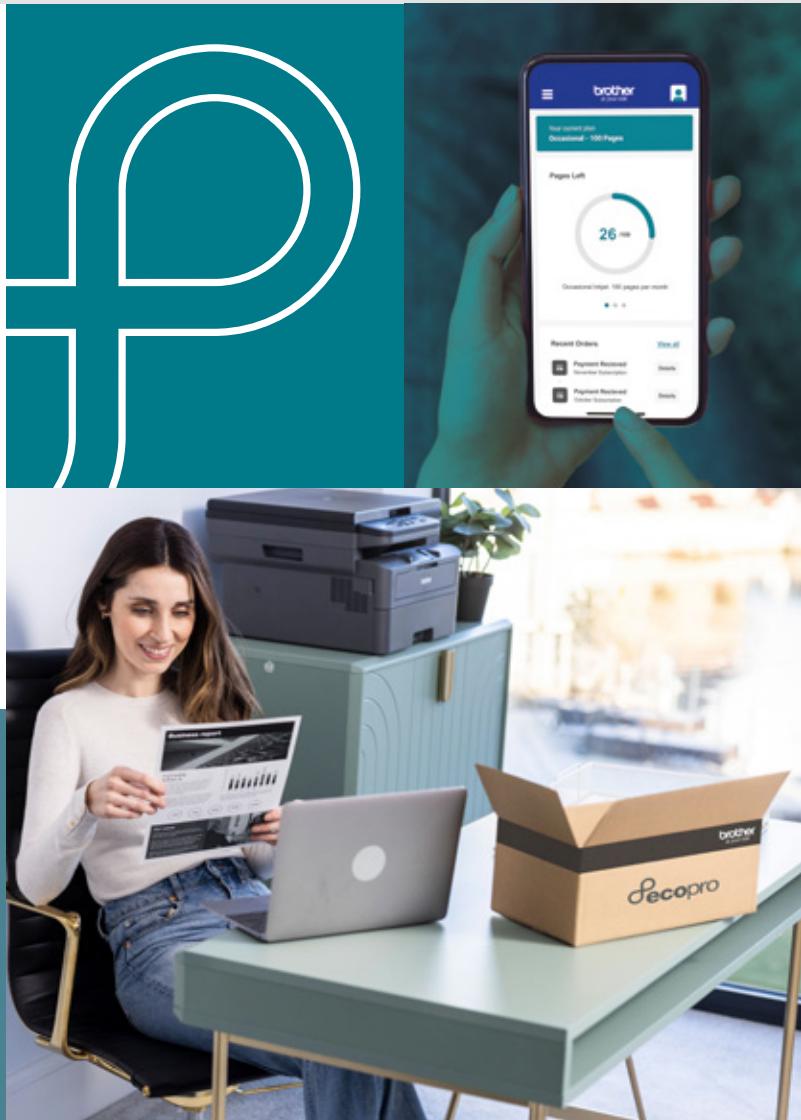

General

Technology	Electrophotographic LED
Memory	256MB
Control panel	1 Line LCD with Keys

Local Interface	Hi-Speed USB 2.0
Wired Network	Gigabit Ethernet

Wireless Network	2.4GHz and 5GHz Support
Carton Contents	Device, Inbox Toners, Drum Unit, Belt Unit, Waste Toner Box, Power Supply Cord, Quick Set-Up Guide, Warranty Card

Print

Print Speed (A4)	Up to 600 x 2400dpi
FPOT (First Print Out Time)	PCL5e, PCL5c, PCL6 (PCL XL Class 3.0), BR-Script3, PDF Version 1.7
Quiet Mode	73 scalable fonts, 12 bitmap fonts
Resolution	Up to 26ppm Mono/Colour 2-Sided: 10 sides per minute Mono/Colour
Print Languages	Up to 13.5 Seconds Mono/Colour

Embedded Barcodes (PCL)	16 bar codes* *Code39, Interleaved 2 of 5, FIM (US-PostNet), Post Net (US-PostNet) EAN-8, EAN-13, UPC-A, UPC-E, Codabar, ISBN (EAN), ISBN (UPC-E), Code128 (set A, set B, set C), EAN128 (set A, set B, set C), Code93, GS1Databar, MSI
Embedded Fonts (Postscript)	66 scalable fonts

Printer Functions

N-up Printing	Store your favourite driver settings as profiles to easily recall them
Poster Printing	Reduce up to 25 pages into a single page
Manual 2-Sided Print	Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages
Reverse Print	Protect print jobs with a 4 digit release code required at the device in order for them to be printed
Toner Save Mode	Rotate the content of a printed document by 180°
ID Printing	Use the Toner Save Mode to reduce toner consumption without affecting print speed
Watermark Printing	Add identification to your printed documents (date and time, short custom message or PC username)
Booklet Printing	Watermark your documents with predefined text, custom logo or custom messages
Secure Print	Print documents in A5 booklet format using automatic or manual 2-sided print

Printer Driver

Windows
Windows 11
(32 and 64 bit editions)
and more

macOS
Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux
CUPS, LPD/LPRng
(x86/x64 environment)

ChromeOS
Supports native
ChromeOS printing

PCL Driver
PCL6 (Standard)

Universal Printer Driver
Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper Handling¹¹

Paper Input
Standard Tray
250 Sheets

Manual Feed Slot
1 Sheet

Paper Output
150 Sheets A4

Envelope Printing
Yes from manual feed slot

Media Sizes
Standard Tray
A4, Letter, Legal, Mexico Legal, India Legal, Executive, A5, A5 Long Edge, A6, B5 (JIS), B5 (ISO), B6 (JIS), A4 Short (270mm), Folio, 16K (195x270mm)

Manual Feed Slot
Width 76.2 to 216 mm
Length 116 to 355.6 mm
Envelope: COM-10, DL, C5, Monarch

Scanner Glass
Up to A4/Letter

Auto 2-Sided
A4

Media Type and Weights
Standard Tray
Plain Paper, Thin Paper, Thick Paper, Recycled Paper, 60 to 163g/m²

Manual Feed Slot
Plain Paper, Thin Paper, Thick Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env.Thick, Glossy Paper, 60 to 163g/m²

Auto 2-Sided
Plain Paper, Thin Paper, Recycled Paper, 60 to 105g/m²

Mobile and Web Connectivity

Brother Mobile Connect¹⁷ (Android)

Print from, scan to, preview copies and check the machine status from an Android device

Brother Mobile Connect¹⁷ (iPad / iPhone)

Print from, scan to, preview copies and check the machine status from an iPad / iPhone

Apple AirPrint¹⁷

Print from and scan to most common file types from any AirPrint enabled application

Brother Print Service Plugin¹⁷

Print from an Android device without a dedicated App.

Mopria™ 17

Print most common file types from Mopria™ supported Android devices

Fleet Management Tools

BRAdmin^{16,17}
LAN/WAN management software

Embedded Web Server
Web based print management software embedded onto the device

Status Monitor¹⁶
Monitor the status of your machine from your computer

Software

Brother iPrint&Scan Desktop^{15,17}

Print from, scan to, preview copies and check the machine status from Windows or macOS PC

Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Easy Setup

Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Connectivity

Wired Network

Gigabit Ethernet (10Base-T/100Base-TX/1000Base-T)

Wireless Network

2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode)
IEEE 802.11 g/n (Wi-Fi Direct)

5GHz: IEEE 802.11 a/n (Infrastructure Mode)
IEEE 802.11 a/n (Wi-Fi Direct)

Wi-Fi Direct®

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless Setup Support

Wi-Fi Protected Setup (WPS)

Wireless Applications

Vertical Pairing

Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local Interface

Hi-Speed USB 2.0

Security Features

Wired Network Security

APOP, SMTP-AUTH, SSL/TLS (IPP, HTTP, SMTP, POP3, IMAP4, FTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Wireless Network Security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)
*Wi-Fi Direct supports WPA2-PSK (AES) only.

SMTP-AUTH, SSL/TLS (IPP, HTTP, SMTP, SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/ Port9100, SMTP Client, IPP/ IPPS, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print), SNTP Client, Syslog

IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, SMTP Client, FTP Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/ HTTPS server, TFTP client and server, ICMPv6, SNTP Client, Web Services (Print), Syslog

IP Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

Secure Print

Protect print jobs with a 4 digit release code required at the device in order for them to be printed

E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail Reports

Receive usage reports on a regular basis via e-mail

Automatic Intrusion

Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware Updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud Secure Print

Enables password protected driverless print job release

Setting Lock

Secures access to the devices control panel by locking it

Certificate Management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public cerificate & private key for protected network communication

Secure Function Lock 3.0

Use a 4 digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control for up to 100 users

Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

Syslog

Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

Port-based Network

Access Control

(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Store Print Log

Allows audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

Supplies and Consumables

Inbox Toner⁸
1 x 1,000 pages (BK)
1 x 1,000 pages (CMY)
Standard Yield Toner⁸
TN248
1,000 pages (BK)
1,000 pages (CMY)

High Yield Toner⁸
TN248XL
3,000 pages (BK)
2,300 pages (CMY)

Drum Unit
DR248CL
Approx. 20,000 pages at 1 page per job

Standard Yield Toner⁸
TN248
1,000 pages (BK)
1,000 pages (CMY)

Belt Unit
BU229CL
Approx. 50,000 pages at 2 pages per job

Dimensions and Weights

With Carton (WxDxH)
488 x 488 x 370mm - 18.00kg

Without Carton (WxDxH)
399 x 399 x 239mm - 15.20kg

Duty Cycle

Recommended Monthly
Up to 3,000 pages

Operating Requirement

Power Requirement
220-240V
AC 50/60Hz

Operating Environment
Humidity 20 - 80 %
10°C - 32.5°C
50°F - 90.5°F

Storage Environment
Humidity 35 - 85 %
0°C - 40°C
32°F - 104°F

Environment

Approx Power Consumption^{13,23}
Printing: 520W
Printing in quiet mode: 310W
Ready: 70W
Sleep: 10W
Deep Sleep: 0.4W
Power Off: 0.04W

Sound Power
Printing: Mono 6.39B(A)
Colour 6.47B(A)
Ready: Inaudible
Quiet Mode: Mono 5.86B(A)
Colour 5.87B(A)
Deep Sleep: Inaudible

Blue Angel
Yes

TEC Value
0.40 kWh/Week

Sound Pressure
PC Printing: Approx. 47.0db(A)
Ready: Inaudible
Quiet Mode: 43.0db(A)

GS Mark
Yes

Nordic Swan
Yes

Toner Save

This reduces the toner consumption to get more pages from your consumables

8 Approx. declared yield value in accordance with ISO/IEC 19798
 11 Capacity calculated with 80gsm paper
 12 Sound pressure and sound power level in accordance with ISO 7779
 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
 15 Windows and macOS only
 16 Windows only
 17 Optional download
 18 Requires an Internet connection
 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Compatible with Brother's EcoPro toner subscription



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

